

# WOODSAFE®

## 2.17 Declaration of Performance Woodsafe WFX Accoya Radiata Pine Panel open

<i>Document name</i> 2.17 Declaration of Performance Woodsafe WFX Accoya Radiata Pine Panel open	<i>Governing document</i> CPR305/2011, EN14915:2013 0402-CPR-SC0260-15	<i>Language / Språk</i> <b>English</b>	<i>Number of pages DoP</i> 3
<i>Fire impregnation system</i> WOODSAFE® Exterior WFX™	<i>Description</i> Waterproof (polymeric) fire impregnation for wooden panels	<i>Version</i> 2	<i>Product code</i> <b>17</b>
<i>Compiled by</i> Peter Johnson, CPO   peter.johnson@woodsafes.com		<i>Supersedes version</i> 1	
<i>Approved by</i> Thomas Bengtsson, CEO   thomas.bengtsson@woodsafes.com.		<i>Date</i> 2025-02-18	

### 1. Product group

WOODSAFE® WFX Accoya Radiata Pine Panel open, in thickness min 22mm.

### 2. Construction product identification

Fire protection system: WOODSAFE® Exterior WFX, fire impregnation  
Wood treatment: Accoya  
Wood specie and product type: Radiata Pine Panel open  
Surface treatment: -  
Product code: 17

Sawn, planed and profiled wooden panels installed with an opening that meet the requirements according to EN14915:2013. Fire protection impregnated according to system Woodsafe Exterior WFX. For more information, see page 2 of this Declaration of performance as well as package specification and associated document.

### 3. The products intended end use/uses

Exterior wooden panel as cladding with material properties against fire.

### 4. Manufacturer

Business: Woodsafe Timber Protection AB with place of manufacture, Fågelbacken brandövningsplats, 72595 Västerås, Sverige.  
VAT: SE556630532101  
Phone: 010-206 72 30. Technical support 010-206 72 37.  
E-mail: [kundtjanst@woodsafes.com](mailto:kundtjanst@woodsafes.com)  
Website: [www.woodsafes.com](http://www.woodsafes.com)  
Registered trademark: WOODSAFE® Exterior WFX™

### 5. System for assessment and continuous control of the construction product's performance, system 1

System 1 for reaction to fire and system 4 for other properties. Production is carried out, controlled and operated by the quality system WQS (Woodsafe Quality System). The quality system ensures that the performance of the manufactured products complies with the characteristics declared in this performance declaration.

### 6. Declared performance in accordance with harmonized standard and notified body

Fire classification

- EN13501-1

Harmonized product standard wood panels

- EN14915:2013

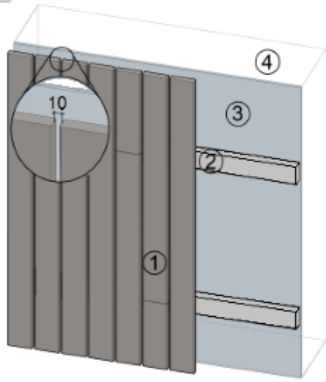
Control body for continuous manufacturing control

- RISE No.0402 Control agreement number 210-09-0082, Rev. 2024-04-11
- Control of continuity of product performance according to system 1 and has issued attestation of continuity of product performance.

# WOODSAFE®

2.17 Declaration of Performance Woodsafe WFX Accoya Radiata Pine Panel open

## 7. Stated performance

Essential properties	Performance			
<b>Reaction to fire</b>	<b>Fire class</b>	B-s1,d0 at 22mm thickness. B-s2,d0 at >22mm thickness Classified according to EN13501-1		
	<b>Joints</b>	Horizontal		
	<b>Installation (1,2,3,4)</b>	1 – Assembly: Horizontal – Vertical – OK with 10mm gap between panels Mechanically attached. 2 – With an air gap to the substrate 3 – All substrates with Euroclass A1 or A2s1,d0 with minimum thickness 12mm and density min 525 kg/m <sup>3</sup> . 4 – NPD		
		<b>Horizontal installation</b>		<b>Vertical installation</b>
				
	<b>Battens (2)</b>	Fireimpregnated wooden battens ≥ 40mm thickness		
	<b>Substrate (3)</b>	Density	Minimum thickness	Fire class EN13501-1
	Min 525 kg/m <sup>3</sup>	12mm	A1, d0 or A2s1, d0	-
<b>Release of formaldehyde</b>	NPD			
<b>Pentachlorophenol content</b>	None			
<b>Vapor permeability</b>	NPD			
<b>Sound absorption</b>	NPD			

Use class	Area of use			Additional information
EN16755	INT1 <i>Normal dry interior</i>	INT2 <i>Varying moist interior</i>	EXT <i>Damp interior and exterior environment</i>	The fire retardant is approved for exterior exposure without surface treatment requirements. Can also be used in an interior environment. Approval is confirmed in a separate type approval certificate.

<b>Intended use</b>	Exterior
<b>Panel type</b>	Fire protection impregnated Accoya modified cladding
<b>Wood specie</b>	Pinus Radiata (Radiata Pine)
<b>Density</b>	600-700 kg/m <sup>3</sup>
<b>Fastening</b>	Stainless acid-resistant screw or nail A4

# WOODSAFE®

## 2.17 Declaration of Performance Woodsafe WFX Accoya Radiata Pine Panel open

### 8. REACH: SVHC (Substances of Very High Concern)

WOODSAFE® Exterior WFX consistent with both REACH Regulation (EC) 1907/2006 and the Biocidal Products Regulation (EU) 528/2012. Exterior WFX does not contain any prohibited chemicals according to REACH. Some substances may be on the SVHC list according to CLP regulations, but as a final product and using fire retardant treated wood, Woodsafe Exterior WFX is not classified as hazardous to health or the environment.

### 9. Associated documents

Associated documents for the product are available at [www.woodsafes.com/en/document-library](http://www.woodsafes.com/en/document-library)

Västerås 2025-02-18  
Woodsafe Timber Protection AB



Thomas Bengtsson, CEO

WOODSAFE®